




DEVELOPMENT BOARDS AND ACCESSORIES



Made for
+ Genuino

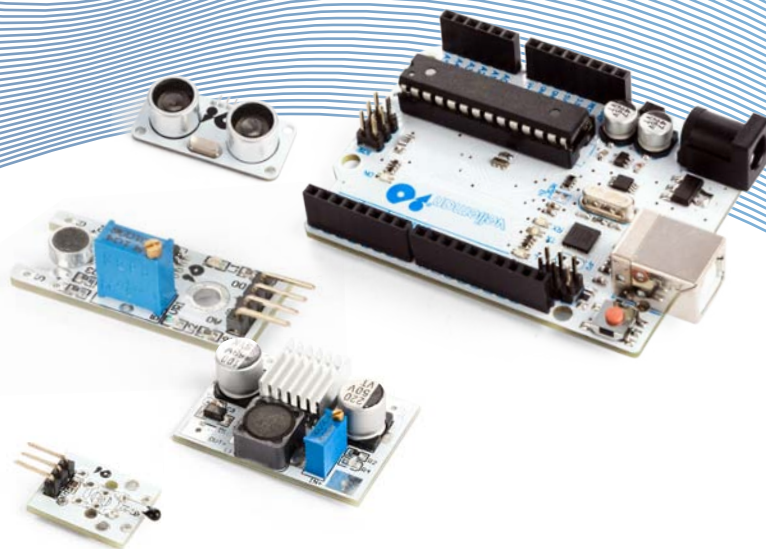

€14,95

ATMEGA328 UNO DEVELOPMENT BOARD

The VMA100 is the perfect development board if you want to create your own projects. It is built around an ATmega 328 microcontroller and comes with multiple outputs: 14 digital input/output pins, 6 analog inputs, ICSP-header, USB connection and a power jack. If these outputs are not enough, there are lots of shields you can use to extend the board's possibilities or outputs. You can program the board with a graphical user interface. This system is freely available for download and is also easy to understand for beginners.

VMA100



€39,95

TEENSY V3.2 - 32 BIT ARDUINO COMPATIBLE MICROCONTROLLER BOARD

De Teensy is a small development board with lots of features. You can use your own editor in C to create programs or use Arduino sketches if you prefer.

TEENSY3.2



€29,95

ATMEGA2560 MEGA DEVELOPMENT BOARD

VMA101 is a development board based on the ATmega2560 microcontroller.

The board has 54 digital input/output pins, 16 analog inputs, 4 UARTs, a 16 MHz crystal oscillator, a USB connection, a power jack, an ICSP header and a reset button. You can connect the board to your computer using a USB cable or power it with an adapter.

VMA101




€17,95

ATMEGA328 NANO DEVELOPMENT BOARD

The tiny Nano board is especially designed for breadboards and very handy to just try out new ideas and projects.

While small in size, its functions are similar to those of the VMA100 thanks to the powerful ATmega328 microcontroller, which is already featured on several other boards. Use a mini-USB cable for power supply and data transfer to the microcontroller.

VMA102

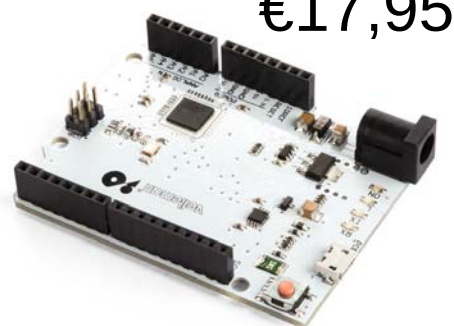

€17,95

ATMEGA32U4 LEONARDO DEVELOPMENT BOARD

Thanks to the VMA103's integrated USB, you have access to several code libraries. Ideal for projects requiring the board to behave as a keyboard, mouse or any other USB HID device.

The board has 20 digital input/output pins, a 16 MHz crystal oscillator, a micro USB connection, a power jack, an ICSP header and a reset button. Just use a USB cable to connect the board to your computer.

VMA103




**I/O SHIELD
FOR ARDUINO®**
VMA05



ETHERNET SHIELD FOR ARDUINO®
VMA04



**MOTOR & POWER SHIELD
FOR ARDUINO®**
VMA03

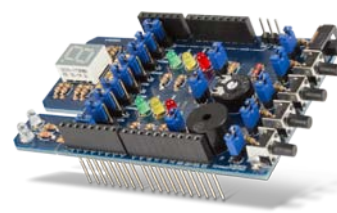


STEM SHIELD FOR ARDUINO
KAEU



**AUDIO SHIELD
FOR ARDUINO®**
VMA02



**RGB SHIELD
FOR ARDUINO®**
VMA01



**STEREO FM RADIO SHIELD
FOR ARDUINO®**
VMA11



VELLEMAN NIBBLE KIT
KA0



€9,95

**ARDUINO® COMPATIBLE EXPANSION
BOARD FOR ARDUINO® UNO R3**
VMA200





€9,95

**LCD & KEYPAD SHIELD
FOR ARDUINO® - LCD1602**
VMA203



€9,95

**ARDUINO® COMPATIBLE
DATA LOGGING SHIELD**
VMA202

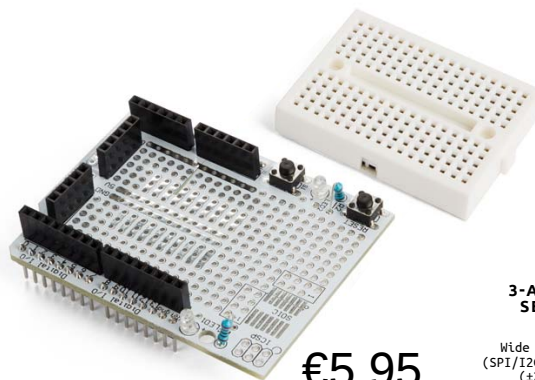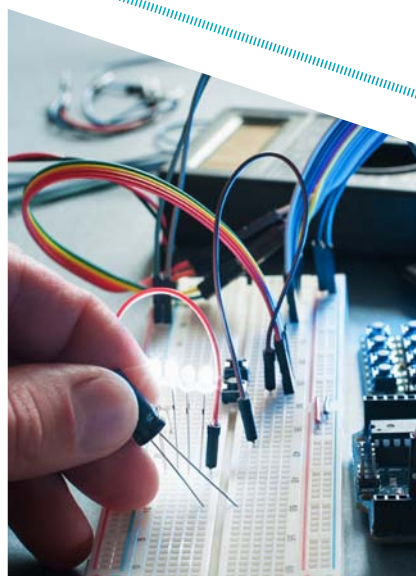

€5,95

**PROTOSHIELD PROTOTYPING BOARD WITH
MINI BREADBOARD FOR ARDUINO® UNO**
VMA201



€5,95

**3-AXIS DIGITAL ACCELERATION
SENSOR MODULE - MMA7455**

It has the following features:
• Wide input voltage range
• Digital output (SPI/I2C)
• Selectable sensitivity: 8-bit mode (±2g/±4g/±8g) or 18-bit mode (±8g)
• User-configurable interrupts (INT1/INT2)
• User-settable registers for calibrating each axis
• Low current operation
• Compact, 8-pin DIP breadboard-friendly package: 12.7 x 15.2 mm

VMA204

Arduino®

Accessories

**ULTRA-COMPACT
SWITCHING POWER
SUPPLY**
9 VDC / 1.9 A

PSS0919

**UNIVERSAL POWER
SUPPLY**
12 VDC - 2 A - 24 W
PLUG 2.1 X 5.5 MM

PSSE1220

€



€9,95

**LM2577 DC-DC VOLTAGE
STEP-UP (BOOST) MODULE**

VMA402



€4,95

**DC-DC BOOST MODULE/
(2.5 V-5 V) 600 mA TO
USB 5 V (2 PCS)**

VMA403



€5,95

**DC-DC ADJUSTABLE
VOLTAGE STEP DOWN
MODULE LM2596S**

VMA404



€5,95

**ARDUINO® COMPATIBLE
5 V RELAY MODULE**

VMA406



€4,95

**3.3 V / 5 V TTL LOGIC LEVEL
CONVERTER MODULE**

VMA410



€5,95

**SUPER-MINI DIGITAL
AMPLIFIER BOARD**

VMA408



€4,95

**ARDUINO® COMPATIBLE
MOS DRIVING MODULE**

This MOS driver module accepts Pulse Width Modulated (PWM) input to drive 24VDC loads. Making it perfect for many projects such as lighting, dc motors, pumps and solenoids.

VMA411



€9,95

4 CHANNEL RELAY MODULE

This board can control various high current appliances. 4 relay outputs. Direct control through 5 VDC signal. Relay output 250 VAC 10 A. Attaches easily with screw clamps

VMA400



€9,95

**L298N DUAL
BRIDGE DC STEPPER
CONTROLLER BOARD**

The L298 Stepper Controller makes it easy to drive either two DC motors or a bipolar stepper motor. This is a very compact board for designs where space really matters.

VMA409



€2,95

**40 PINS 30 CM MALE
TO MALE JUMPER
WIRE (FLAT CABLE)**

VMA413



€2,95

**40 PINS 30 CM MALE
TO FEMALE JUMPER
WIRE (FLAT CABLE)**

VMA414



€2,95

**40 PINS 30 CM FEMALE
TO FEMALE JUMPER
WIRE (FLAT CABLE)**

VMA415



€5,95

**5 VDC STEPPER
MOTOR WITH ULN2003
DRIVER BOARD**

High quality stepper motor with ULN2003 driver. Suitable for microcontroller. Operating voltage: 5 VDC. Diameter: 28 mm. Step Angle: 5.625 x 1/64. Reduction ratio: 1/64

VMA401



€4,95

**ARDUINO® COMPATIBLE
PHOTOSENSITIVE
SENSOR MODULE
WITH 3 PIN CABLE**

VMA407



€11,95

**ARDUINO® COMPATIBLE RFID READ
AND WRITE MODULE**

The MFRC-522 is embedded in pretty much every phone or device that does NFC. It can read and write to tags and cards, communicate with phones, and 'act' like a NFC tag. If you want to do any sort of embedded NFC work, this is the chip you'll want to use!

VMA405




€7,95

**ATMEGA328P MCU IC WITH ARDUINO® UNO
BOOTLOADER AND 16 MHZ CRYSTAL**

An ATmega328P microcontroller for you to build your very own customised Arduino compatible projects. It comes with the Arduino Uno bootloader pre-installed. Includes 16 MHz crystal oscillator.

VMA416

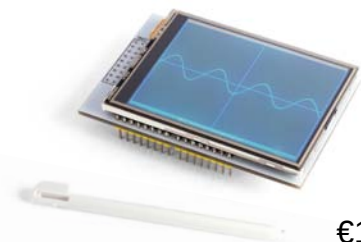

€19,95

2.8 INCH TOUCH SCREEN FOR ARDUINO® UNO/MEGA

Add a beautiful touch screen to your project with this 2.8" display and a microSD slot on a shield. The shield comes completely assembled, tested and ready to use. No cables, no soldering required. Just plug in the shield, load the library and your display will be up and running in less than 10 minutes!

VMA412

Interfaces

Arduino®

Arduino®

Sensors



€4,95

**ARDUINO® COMPATIBLE
SOIL MOISTURE
SENSOR + WATER LEVEL
SENSOR MODULE**

VMA303



€4,95

**ARDUINO® COMPATIBLE
TACTILE SWITCH SENSOR
MODULE (2 PCS)**

VMA310



€4,95

**ARDUINO® COMPATIBLE
RGB LED MODULE
(2 PCS)**

VMA307



€4,95

**ARDUINO® COMPATIBLE
MINI MAGNETIC REED
MODULE (2 PCS)**

VMA308



€4,95

**ARDUINO® COMPATIBLE
MICROPHONE SOUND
SENSOR MODULE**

VMA309



€4,95

**PIR MOTION SENSOR
FOR ARDUINO®**

VMA314



€5,95

**XY JOYSTICK MODULE
(2 PCS)**

VMA315



€4,95

**ARDUINO® COMPATIBLE
INFRARED TRANSMITTER
MODULE (2 PCS)**

VMA316



€4,95

**ARDUINO® COMPATIBLE
1838 IR INFRARED 37.9 kHz
RECEIVER (2 PCS)**

VMA317



€4,95

**ARDUINO® COMPATIBLE
3 COLOUR RGB SMD
LED MODULE (2 PCS)**

VMA318



€4,95

**ARDUINO® COMPATIBLE
ACTIVE BUZZER
MODULE (2 PCS)**

VMA319



€5,95

**ARDUINO® COMPATIBLE
ANALOGUE TEMPERATURE
SENSOR MODULE (2 PCS)**

VMA320



€4,95

**HC-SR05 ULTRASONIC
SENSOR**

Ultrasonic sensors overcome many of the weaknesses of IR sensors - they provide distance measurement regardless of color and lighting of obstacles. VMA306 with the HC-SR05 sensor is an upgrade from the lower precision HC-SR04. This has 5 pins and can be used in 1-pin trigger/echo or 2-pin.

VMA306



€4,95

**DHT11 DIGITAL
TEMPERATURE HUMIDITY
SENSOR MODULE
FOR ARDUINO®**

The DHT11 is a very popular, low cost digital temperature and humidity sensor. It uses a capacitive humidity sensor and a thermistor to measure the surrounding air temperature. The sensor sends out new data once every 2 seconds.

VMA311



€4,95

**SD CARD LOGGING SHIELD
FOR ARDUINO® (2 PCS)**

This shield will prove useful for data logging with your Arduino. Can be easily assembled and customised for any data logging project.

The SD card interface works with FAT16 and FAT32 formatted cards. Real time clock (RTC) keeps the time going even when the Arduino is unplugged. Prototyping area for soldering connectors, circuitry or sensors.

VMA304



€3,95

**3 X 4 MATRIX
MEMBRANE KEYPAD**

This keypad has 12 buttons, arranged in a telephone-line 3x4 grid. It's made of a thin, flexible membrane material with an adhesive backing so you can attach it to nearly anything. Comes with a 7-pin header strip so you can plug this into a breadboard with ease.

VMA300



€14,95

**BLUETOOTH HC-05
TRANSMISSION MODULE**

The HC-05 bluetooth module is one of the most popular bluetooth modules used in embedded projects.

It can be easily interfaced with Arduino Boards, Raspberry Pi or other microcontrollers through the serial UART interface.

VMA302



€4,95

**DS1302 REAL-TIME
CLOCK MODULE WITH
BATTERY CR2032 (2 PCS)**

The real time clock module provides seconds, minutes, hours, days, date, months, and year information. It communicates with a microprocessor via an I2C interface and has a battery backup.

VMA301



€4,95

**1 A LITHIUM BATTERY
CHARGING BOARD
(2 PCS)**

VMA321




€4,95

**ARDUINO® COMPATIBLE
HALL (HOLZER) MAGNETIC
SWITCH MODULE (2 PCS)**

The VMA313 Hall magnetic sensor module is a switch that will turn on/off in the presence of a magnetic field.

VMA313



€4,95

**CAPACITIVE TOUCH
SENSOR SWITCH**

The module is based on a touch-sensing IC capacitive touch switch module. In the normal state, the module output is low; When a finger touches the corresponding position, the module output goes high.

VMA305



€4,95

**ARDUINO® COMPATIBLE
VIBRATION/ SHOCK
SWITCH MODULE (2 PCS)**

The VMA312 allows you to use an Arduino to detect impacts, shocks or shaking. When the switch detects a jolt, the output of the module is sent low.

VMA312



€44,95

DIY STARTER KIT FOR ARDUINO®
VMA501




€24,95

2 WHEEL DRIVE MOTOR CHASSIS ROBOTICS KIT
VMA500



€49,95

BASIC DIY KIT WITH ATMEGA2560 FOR ARDUINO®
VMA502

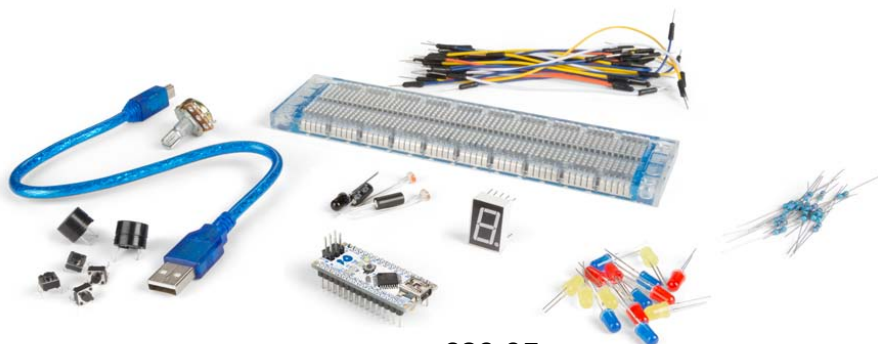

€39,95

BASIC ARDUINO® COMPATIBLE EXPERIMENTER'S KIT
VMA504




€39,95

ELECTRONIC PARTS PACK FOR ARDUINO®
VMA503

Starter kits

Arduino®

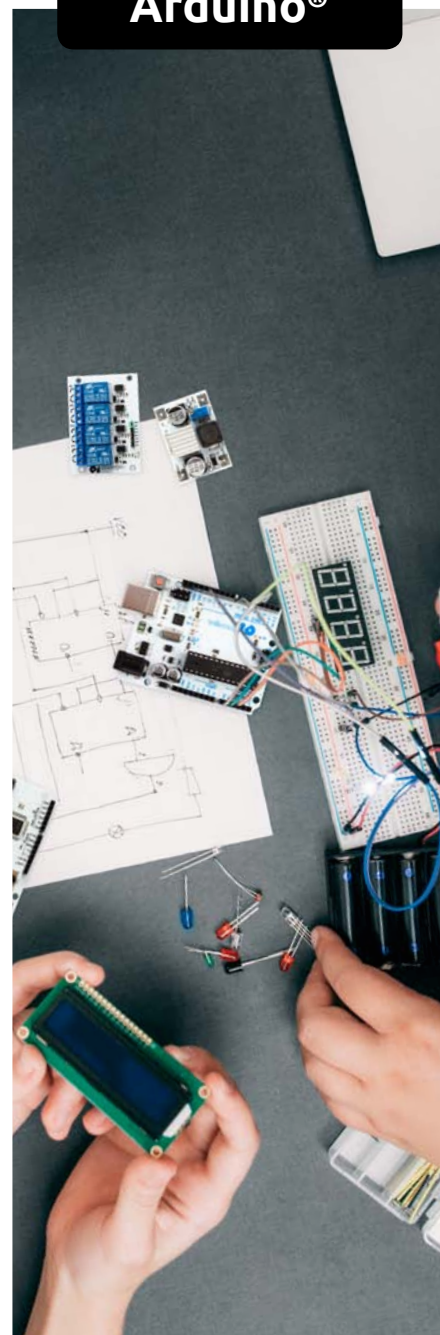

Raspberry Pi®

Kits



This box contains everything that is needed to get started with Raspberry Pi. Make your first steps with this kit!



RASPBERRY PI® 3B STARTER KIT

processor: 1.2 GHz quad core BCM2837 ARMv8 64 bit processor • connectivity: built-in WiFi (802.11B/G/N) and Bluetooth Low Energy (BLE) • RAM: 1 GB • GPU: VideoCore IV • USB: 4 x USB 2.0 ports • Ethernet: 10/100 Ethernet port • video output: full-size HDMI and composite • sound: L/R stereo line-out • operating system: microSD card to load and store OS • digital interfaces: 1 x CSI camera port and 1 x DSI display port • GPIO: 40 general purpose input/output pins • power: requires 5 V 2.4 A USB power supply

PI3SET

RASPBERRY PI CAMERA CASE

TKCAMW - WHITE
TKCAMB - BLACK



RASPBERRY PI B+ CASE

TKBERRYWB - WHITE
TKBERRYBB - BLACK



RASPBERRY PI B+ CAMERA CASE

TKCAMWB - WHITE
TKCAMBB - BLACK



RASPBERRY PI B CASE FOR RASPBERRY PI B+, 2B AND 3B

PICASE1W - WHITE / PICASE1C - CLEAR
PICASE1B - BLACK



HOUSING FOR RASPBERRY PI 2 & MODEL B+

TKBERRY2B



Raspberry Pi®

Accessories



HIGH SPEED HDMI® 2.0 WITH ETHERNET
HDMI PLUG TO HDMI
PLUG CABLE - 1.5 m

PAC415B015



FTP NETWORK
CABLE, SHIELDED
RJ45, CAT 5E
(100MBPS) - 1 m

CW101



USB 2.0 A PLUG
TO USB 2.0 A PLUG
1.8 m

PAC600B018N



COMPACT CHARGER
WITH MICRO-USB
CONNECTOR
5 VDC - 2 A - 10 W

PSSEUSB25B

General accessories



**ASSORTED JUMPER
WIRE SET (350 PCS)**
WJW350



**ASSORTED JUMPER
WIRE SET (140PCS)**
WJW70



**SOLDERLESS BREADBOARD
830 HOLES + JUMPER
WIRES - 140 PCS**
VTB81



**MINI BREADBOARD AND
JUMPER WIRE PACK**
SD09N



RESISTOR TRIMMER SET
K/TRIMSET1



TRANSISTOR SET
K/TRANS1



**SET OF 480 RESISTORS
(E3-SERIES)**
K/RES-E3



**SET OF 610 RESISTORS
(E12-SERIES)**
K/RES-E12



SET OF 80 ASSORTED LEDs
K/LED1



SET OF 120 DIODES
K/DIODE1



**ELECTROLYTIC
CAPACITOR SET**
K/CAP2




CERAMIC CAPACITOR SET
K/CAP1



**SMD "E12" RESISTORS
SET - 0603**
K/RES0603



SMD STORAGE BOX
SMDBOX14



**SET AWG BREADBOARD JUMPER
WIRES - ONE PIN MALE TO
MALE - 5.9" (15 CM) (10 PCS)**
WJW004



**SET AWG BREADBOARD JUMPER
WIRES - ONE PIN MALE TO
FEMALE - 5.9" (15 CM) (10 PCS)**
WJW005



**SET AWG BREADBOARD JUMPER
WIRES - ONE PIN FEMALE TO
FEMALE - 5.9" (15 CM) (10PCS)**
WJW006



**SET AWG JUMPER WIRES
ONE PIN MALE
TO MALE (65 PCS)**
WJW009

Technical product list



VMA100

ATMEGA328 UNO DEVELOPMENT BOARD €14,95

microcontroller: ATmega328 • operating voltage: 5 VDC • input voltage (recommended): 7-12 VDC • input voltage (limits): 6-20 VDC • digital I/O pins: 14 (of which 6 provide PWM output) • analogue input pins: 6 • DC current per I/O pin: 40 mA • DC current for 3.3 V pin: 50 mA • flash memory: 32 kB (ATmega328) of which 0.5 kB used by bootloader • SRAM: 2 kB (ATmega328) • EEPROM: 1 kB (ATmega328) • clock speed: 16 MHz • length: 68.6 mm • width: 53.4 mm • weight: 25 g • 100% compatible with Arduino® UNO



VMA101

ATMEGA2560 MEGA DEVELOPMENT BOARD €29,95

microcontroller: ATmega2560 • operating voltage: 5 VDC • input voltage (recommended): 7-12 VDC • input voltage (limits): 6-20 VDC • digital I/O pins: 54 (of which 15 provide PWM output) • analogue input pins: 16 • DC current per I/O pin: 40 mA • DC current for 3.3 V pin: 50 mA • flash memory: 256 kB of which 8 kB used by bootloader • SRAM: 8 kB • EEPROM: 4 kB • clock speed: 16 MHz • length: 112 mm • width: 55 mm • weight: 62 g • 100% compatible with Arduino® MEGA2560



VMA102

ATMEGA328 NANO DEVELOPMENT BOARD €17,95

microcontroller: Atmel ATmega168 or ATmega328 • operating voltage: 5 VDC • input voltage (recommended): 7-12 VDC • input voltage (limits): 6-20 VDC • digital I/O pins: 14 (of which 6 provide PWM output) • analogue input pins: 8 • DC current per I/O pin: 40 mA • flash memory: 16 kB (ATmega168) or 32 kB (ATmega328) • SRAM: 1 kB (ATmega168) or 2 kB (ATmega328) • EEPROM: 512 bytes (ATmega168) or 1 kB (ATmega328) • clock speed: 16 MHz • length: 45 mm • width: 18 mm • weight: 5 g • 100% compatible with Arduino® NANO 3.0



VMA103

ATMEGA32U4 LEONARDO DEVELOPMENT BOARD €17,95

microcontroller: ATmega32u4 • operating voltage: 5 VDC • input voltage (recommended): 7-12 VDC • input voltage (limits): 6-20 VDC • digital I/O pins: 20 • analogue input pins: 12 • PWM channels: 7 • DC current per I/O pin: 40 mA • DC current for 3.3 V pin: 50 mA • flash memory: 32 kB (ATmega32u4) of which 4 kB used by bootloader • SRAM: 2.5 kB (ATmega32u4) • EEPROM: 1 kB (ATmega32u4) • clock speed: 16 MHz • length: 68.6 mm • width: 53.3 mm • weight: 20 g • 100% compatible with Arduino® LEONARDO



VMA200

ARDUINO® COMPATIBLE EXPANSION BOARD FOR ARDUINO® UNO R3 €9,95

dimensions: 68 x 53 x 12 mm • with reset button • SOIC-14 breakout for surface mounted devices



VMA201

PROTOSHIELD PROTOTYPING BOARD WITH MINI BREADBOARD FOR ARDUINO® UNO €5,95

1.0 Arduino Pinout • reset button • free to use button + LED circuit • ICSP connector location • 14 pin SMD footprint • 20 pin through-hole footprint • 170 holes self-adhesive breadboard included • compatible with: Leonardo, Uno, Mega, Classic



VMA202

ARDUINO® COMPATIBLE DATA LOGGING SHIELD €9,95

back-up battery: CR1220 battery (incl.) • dimensions: 43 x 17 x 9 mm • stackable headers • reset button • prototyping area (102 solder pads) for soldering connectors, circuitry or sensors • back-up battery for RTC included • uses the Arduino SD and RTC libraries • with onboard 3.3 V regulator to run SD cards that require a lot of power



VMA203

LCD & KEYPAD SHIELD FOR ARDUINO® - LCD1602 €9,95

dimensions: 80 x 58 x 20 mm • blue background / white backlight • screen contrast adjustment • uses 4 bit Arduino LCD library • reset button • the Up, Down, Left, Right buttons use only one analogue input



VMA204

3-AXIS DIGITAL ACCELERATION SENSOR MODULE - MMA7455 €5,95

IIC / SPI and interfaces • Z-axis self calibration • 2.4 V - 3.6 V operation (onboard regulator; module operates from 5 V) • programmable threshold interrupt output • level detection for motion recognition (shock, shock & move, free fall) • pulse detection for single pulse or double pulse recognition • sensitivity: 64 LSB/g @ 2 g, @ 8 g in 10-bit mode • selectable sensitivity (± 2 g, ± 4 g, ± 8 g) for 8-bit mode



VMA300

3 X 4 MATRIX MEMBRANE KEYPAD €3,95

dimensions: 7 x 7.7 x 0.1 cm • connection: 3 col - 4 row, 7 pin connection • cable length: 9 cm • weight: 6.25 g • library: keypad.h •



VMA301

DS1302 REAL-TIME CLOCK MODULE / WITH BATTERY CR2032 (2 PCS) €4,95


• manages all timekeeping functions: real-time clock counts seconds, minutes, hours, date of the month, month, day of the week, and year with leap year • 31 x 8 battery-backed general-purpose RAM • simple serial port interfaces to most microcontrollers: simple 3-wire interface • TTL compatible: VCC = 5 V • single-byte or multiple-byte (burst mode) data transfer for read or write of clock or RAM data • low power operation extends battery backup run time: 2.0 V to 5.5 V full operation • uses less than 300 nA at 2.0 V • temperature range: 0°C to +70°C



VMA302

BLUETOOTH HC-05 TRANSMISSION MODULE €14,95

frequency: 2.45 GHz • asynchronous speed: max. 2.1 Mbps • security: authentication • profile: Bluetooth Serial Port • power supply: +3.3 VDC • working temperature: max. 60°C •





VMA303 €4,95

ARDUINO® COMPATIBLE SOIL MOISTURE SENSOR + WATER LEVEL SENSOR MODULE
voltage: 5 VDC • dimensions: 65 x 20 mm • weight: 5 g •



VMA304 €4,95

SD CARD LOGGING SHIELD FOR ARDUINO® (2 PCS)
voltage: 3.3 V - 5 V • protocol: SPI • dimensions: 52 x 30 x 12 mm • weight: 8 g • required library: SD.h •



VMA305 €4,95

CAPACITIVE TOUCH SENSOR SWITCH
connection: 3 pins, GRD - VCC - Signal • voltage: 3 to 5 VDC • dimensions: 30 x 16 x 6 mm • weight: 5 g •



VMA306 €4,95

HC-SR05 ULTRASONIC SENSOR
voltage: 4,5 to 5,5 VDC • sound frequency: 40 KHz • measurement resolution: 0.3 cm • measurement angle: 15 ° • supply current: 10 to 40 mA • trigger pin format: 10 uS pulse • connector: 5 pin male • detection distance: 2 to 450 cm • dimensions: 45 x 20 x 13 mm •



VMA307 €4,95

ARDUINO® COMPATIBLE RGB LED MODULE (2 PCS)
voltage: 5 VDC • connection: 4 pin male header • pins: GND, RED, GREEN, BLUE • size: 24 x 16 x 16 mm • weight: 2 g •



VMA308 €4,95

ARDUINO® COMPATIBLE MINI MAGNETIC REED MODULE (2 PCS)
voltage: 5 VDC • connection: 3 pins, +(middle pin), ground and DO (data out) • size: 25 x 15 mm • weight: 2 g •



VMA309 €4,95

ARDUINO® COMPATIBLE MICROPHONE SOUND SENSOR MODULE
voltage: 3.3 to 5 VDC • outputs: one analogue + one digital output • fixation: 1 mounting screw hole 3 mm • 2 indicator LEDs: 1 power indicator + 1 comparator output indicator • frequency response: 50 Hz - 20 KHz • impedance: 2.2 K Ohm • sensitivity: 48 - 66 dB • operating temperature: -40 to +85°C • size: 44 x 15 x 10 mm • weight: 4 g •



VMA310 €4,95

ARDUINO® COMPATIBLE TACTILE SWITCH SENSOR MODULE (2 PCS)
voltage: 5 VDC • connection: 3 pins, +(middle pin), ground and DO (data out) • size: 25 x 15 mm • weight: 2 g •



VMA311 €4,95

DHT11 DIGITAL TEMPERATURE HUMIDITY SENSOR MODULE FOR ARDUINO®
voltage: 5 VDC • temperature range: 0 - 50 °C , error of +/- 2 °C • humidity: 20 - 90% RH +/- 5% RH error • interface: digital • size: 39 x 23 x 10 mm. •




VMA312 €4,95

ARDUINO® COMPATIBLE VIBRATION / SHOCK SWITCH MODULE (2 PCS)
voltage: 5 VDC • connection: 3 pins, +(middle pin), ground and DO (data out) • size: 25 x 15 mm • weight: 2 g •



VMA313 €4,95

ARDUINO® COMPATIBLE HALL (HOLZER) MAGNETIC SWITCH MODULE (2 PCS)
voltage: 5 VDC • connection: 3 pins, +(middle pin), ground and S (data out) • output (S): Schmitt Trigger, Active Low • activation: 30 Gauss • deactivation: 10 Gauss • LED indicator: ON when activated • size: 25 x 15 mm • weight: 2 g •



VMA314 €4,95

PIR MOTION SENSOR FOR ARDUINO®
voltage: 5 VDC • connection: 3 pin: GND, VCC and OUT • adjustments: sensitivity and delay (by trimmer) • delay time: 0.3 to 18 s • output level: high = 3 V, Low = 0 V • max. sensor distance: 7 m • operating temperature: -15 to +70°C • detection angle: 120 ° • dimensions: 32 x 24 x 25 mm •





VMA315 €5,95
XY JOYSTICK MODULE (2 PCS)
 voltage: 3 to 5 VDC • contains: 2 trimmers 10K + 1 switch • dimensions: 47 x 25 x 32 mm • weight: 15 g •



VMA316 €4,95
ARDUINO® COMPATIBLE INFRARED TRANSMITTER MODULE (2 PCS)
 max. current: 20 mA • connection: 3 pins, only GND (-) and S is used • weight: 2 g • dimensions: 35 x 15 x 8 mm • Attention: There is no current limiting resistor on the module. •



VMA317 €4,95
ARDUINO® COMPATIBLE 1838 IR INFRARED 37.9 KHZ RECEIVER (2 PCS)
 supply voltage: 3 to 5 VDC • max. supply current: 1.5 mA • B.P.F. center frequency: 37.9 KHz • dimensions: 28 x 15 x 10 mm • photo detector and preamplifier in one package • internal filter for PCM frequency • inner shield, good anti-interference ability • high immunity against ambient light • improved shielding against electric field disturbance • 3.0 V or 5.0 V supply voltage; low power consumption • TTL and CMOS compatibility



VMA318 €4,95
ARDUINO® COMPATIBLE 3 COLOUR RGB SMD LED MODULE (2 PCS)
 power dissipation: R 60mW, G 95mW, B 95mW • Peak Forward Current (0,1ms Pulse Width): 100 mA for each colour • continuous forward current: 25 mA for each LED • max. reverse voltage: 5 V • operating temperature: -40 °C to 80 °C • dimensions: 28 x 15 x 5 mm • common: cathode (-) • Attention: Current has to be limited by using resistors. •



VMA319 €4,95
ARDUINO® COMPATIBLE ACTIVE BUZZER MODULE (2 PCS)
 operating voltage: 5 VDC • buzzer frequency: 1.5 to 2.5 KHz • connection: 3 pin, (-) and (S). (+) is not used • dimensions: 25 x 15 x 10 mm •



VMA320 €5,95
ARDUINO® COMPATIBLE ANALOGUE TEMPERATURE SENSOR MODULE (2 PCS)
 NTC type: NTC-MF52 3950 • temperature range: -55 °C to 125 °C • accuracy: +/- 0.5°C • pull-up resistor: provided, 10 KOhm • connection: 3 pin, (+) 5V, (-) ground, (S) analogue output • dimensions: 20 x 15 x 5 mm •



VMA321 €4,95
1 A LITHIUM BATTERY CHARGING BOARD (2 PCS)
 operating voltage: 4.5 to 5.5 VDC (by on-board USB connector) • charging current: 1 A adjustable • charge accuracy: 1.5 % • full charge voltage: 4.2 V • charge indicator: green = fully charged, red = charging • working temperature: -10°C to +80°C • weight: 10 g • dimensions: 25 x 19 x 10 mm •



VMA400 €9,95
4 CHANNEL RELAY MODULE
 control input current (in1 to in4): 15 - 20 mA • control input voltage: 5 - 12 VDC • relay output: 250 VAC 10 A; 30 VDC 10 A (non-inductive) • standard interface that can be controlled directly by any microcontroller • opto-isolated inputs • indicator LEDs for relay output status



VMA401 €5,95
5 VDC STEPPER MOTOR WITH ULN2003 DRIVER BOARD
 operating voltage: 5 VDC • steps / revolution: 64 • controller: ULN2003 • motor diameter: 28 mm • reduction ratio: 1:64 • number of phases: 4 • dimensions: 35 x 32 x 10 mm • with LED step indicators • included: 5 V stepper motor • ULN2003 controller module • cable



VMA402 €9,95
LM2577 DC-DC VOLTAGE STEP-UP (BOOST) MODULE
 input voltage: 3.5 to 35 VDC • output voltage: 5 to 55 VDC (adjustable) • max. input current: 3 A • Continuous input current: 2 A • chip: LM2577 • dimensions: 43 x 30 x 12 mm •



VMA403 €4,95
DC-DC BOOST MODULE / (2.5 V-5 V) 600 MA TO USB 5 V (2 PCS)
 input voltage range: 2.5 to 5 VDC • output voltage: 5 VDC • connection: solder pads • dimensions: 34 x 16 x 8 mm •



VMA404 €5,95
DC-DC ADJUSTABLE VOLTAGE STEP DOWN MODULE LM2596S
 input voltage: 3 to 40 VDC • output voltage: 1.25 to 35 VDC • max. input current: 2.5 A • chip: LM2596S • dimensions: 49 x 26 x 12 mm •





VMA405 €11,95

ARDUINO® COMPATIBLE RFID READ AND WRITE MODULE

operating voltage: 3.3 VDC • working current: 13 to 26 mA • sleep current: < 80 uA • peak current: < 30 mA • working frequency: 13.56 MHz • supported card types: Mifare cards • interface / protocol: SPI • controller chip: MFRC522 • data transmission speed: Max. 10 Mbit / s • dimensions: 66 x 40 x 7 mm • includes: 2 tags (1 card , 1 fob) •



VMA406 €5,95

ARDUINO® COMPATIBLE 5 V RELAY MODULE

operating voltage: 5 VDC • relay current rating: 10 A at 250 VAC, 10 A at 30 VDC (non inductive) • relay contact: C, NO, NC • connection: GND, +5 VDC, control input (5 to 12 VDC) • dimensions: 40 x 27 x 18 mm •



VMA407 €4,95

ARDUINO® COMPATIBLE PHOTOSENSITIVE SENSOR MODULE WITH 3 PIN FLAT CABLE

operating voltage: 3.3 VDC or 5 VDC • output: analog voltage • pull-down resistor: 10 K Ω , on board • dimensions: 25 x 15 mm •



VMA408 €5,95

SUPER-MINI DIGITAL AMPLIFIER BOARD


operating voltage: 2.5 to 5 VDC • connections: solder connections • sound processor: PAM8403 • dimensions: 23 x 16 x 2 mm • high amplification efficiency 85% • can directly drive 4 0/8 0 small speakers • good sound quality & noise suppression • unique without LC filter class D digital power board • can use computer USB power supply directly • low THD+N • short circuit protection • thermal shutdown



VMA409 €9,95

L298N DUAL BRIDGE DC STEPPER CONTROLLER BOARD

driver: L298N • driver power supply: + 5 V to + 35 V • driver output current (max.): 2A • logic power output Vss: +5 V to +7 V (internal supply +5 V) • logic current: 0-36 mA • controlling level: low -0.3 V to 1.5 V, high: 2.3 V-Vss • enable signal level: low -0.3 V to 1.5 V, high: 2.3 V-Vss • max. power: 25 W • working temperature: -25C to +130 °C • dimensions: 69 x 56 x 36 mm •



VMA410 €4,95

3.3 V / 5 V TTL LOGIC LEVEL CONVERTER MODULE


low side (3.3 V): 2 inputs and 2 outputs • high side (5 V): 2 inputs and 2 outputs • other connections: Vlow (3.3 V), Vhigh (5 V) , pass-through GND • dimensions: 15 x 16 x 15 mm • breadboard compatible



VMA411 €4,95

ARDUINO® COMPATIBLE MOS DRIVING MODULE

operating voltage: 3 to 5 VDC • max. load voltage: 0 to 24 VDC • input: SIG pin, logic level 3 to 5 VDC • max. load current: 5 A (a heatsink is required for loads > 1 A) • used MOSFET: IRF520 • dimensions: 34 x 21 x 16 mm •



VMA412 €19,95

2.8 INCH TOUCH SCREEN FOR ARDUINO® UNO/MEGA

resolution: 240 RGB (H) x 320 (V) • colour depth: 262 000 colours • system interface: •• 8-bits, 9-bits, 16-bits, 18-bits interface with 8080-I /8080-II series MCU •• 6-bits, 16-bits, 18-bits RGB interface with graphic controller •• 3-line / 4-line serial interface • display mode: •• Full colour mode (Idle mode OFF): 262 000 colour (selectable colour depth mode by software) •• reduced colour mode (Idle mode ON): 8-colour • operating temperature: -40 °C to +85 °C



VMA413 €2,95

40 PINS 30 CM MALE TO MALE JUMPER WIRE (FLAT CABLE)

length: 30 cm (11.8") • diameter: 22-26AWG • insulation material: PVC • conductor material: copper • type: male to male connector cable • contents: 1 pc. of multi-colour flat cable (40 wires) • pre-cut, pre-stripped and pre-formed wires simplify and speed up prototyping work • easy to connect and disconnect • these wires are compatible with standard breadboards that have 0.1" grids



VMA414 €2,95

40 PINS 30 CM MALE TO FEMALE JUMPER WIRE (FLAT CABLE)

length: 30 cm (11.8") • diameter: 22-26AWG • insulation material: PVC • conductor material: copper • type: male to female connector cable • contents: 1 pc. of multi-colour flat cable (40 wires) • pre-cut, pre-stripped and pre-formed wires simplify and speed up prototyping work • easy to connect and disconnect • these wires are compatible with standard breadboards that have 0.1" grids



VMA415 €2,95

40 PINS 30 CM FEMALE TO FEMALE JUMPER WIRE (FLAT CABLE)

length: 30 cm (11.8") • diameter: 22-26AWG • insulation material: PVC • conductor material: copper • type: female to female connector cable • contents: 1 pc. of multi-colour flat cable (40 wires) • pre-cut, pre-stripped and pre-formed wires simplify and speed up prototyping work • easy to connect and disconnect • these wires are compatible with standard breadboards that have 0.1" grids



VMA416 €7,95

ATMEGA328P MCU IC WITH ARDUINO® UNO BOOTLOADER AND 16 MHZ CRYSTAL





VMA500 €24,95

2 WHEEL DRIVE MOTOR CHASSIS ROBOTICS KIT

motor voltage: 5-10 VDC • pre-drilled mounting plates • one DC motor + gearbox per wheel



VMA501 €44,95

DIY STARTER KIT FOR ARDUINO®

This basic kit includes: 1 x ATmega328 UNO DEVELOPMENT BOARD (VMA100) • 15 x LED (different colors) • 8 x 220 Ohm resistor (RA220E0) • 5 x 1K resistor (RA1K0) • 5 x 10K resistor (RA10K0) • 1 x 830 hole breadboard • 1 x RGB LED module (VMA318) • 4 x 4-pin Key switch • 1 x Active buzzer (VMA319) • 1 x Passive buzzer • 1 x 1838 IR Infrared 37.9Khz Receiver (VMA317) • 1 x Infrared remote control • 1 x infrared sensor diode • 1 x LM35 temperature sensor (LM35DZ) • 2 x Ball tilt switch (similar to MERS4 & MERS5) • 3 x Photosensitive resistor LDR (similar to LDR04) • 1 x 74HC595 Shift register (HC595) • 1 x Battery holder for 6 AA battery's (similar to BH363B) • 1 x 8*8 LED Matrix display • 1 x single digit 7 segment LED display • 1 x 4 digit 7 segment LED display • 30 x Breadboard jumper wire • 1 x USB cable



VMA502 €49,95

BASIC DIY KIT WITH ATMEGA2560 FOR ARDUINO®

This kit includes: 1 x ATmega2560 MEGA DEVELOPMENT BOARD (VMA101) • 15 x LED (different colors) • 8 x 220 Ohm resistor (RA220E0) • 5 x 1K resistor (RA1K0) • 5 x 10K resistor (RA10K0) • 1 x 830 hole breadboard • 4 x 4-pin Key switch • 1 x Active buzzer (VMA319) • 1 x Passive buzzer • 1 x infrared sensor diode • 1 x LM35 temperature sensor (LM35DZ) • 2 x Ball tilt switch (similar to MERS4 & MERS5) • 3 x Photosensitive resistor LDR (similar to LDR04) • 1 x single digit 7 segment LED display • 30 x Breadboard jumper wire • 1 x USB cable



VMA503 €39,95

ELECTRONIC PARTS PACK FOR ARDUINO®

breadboard • Plastic plate • 30 x Breadboard jumper wire • 40 x Jumper pins • 38 x LED (different colors) • 2 x LED (RGB) • 2 x buzzer • 8 x push buttons (different colors) • 10 x 22pF • 10 x 100pF • 10 x 10nF • 10 x 100nF • 10 x 10µF capacitor • Trim potentiometer



VMA504 €39,95

BASIC ARDUINO® COMPATIBLE EXPERIMENTER'S KIT

1 x ATmega328 NANO development board (VMA102) • 1 x USB cable • 1 x Breadboard • 30 x Breadboard jumper wire • 2 x Light Dependant Resistors • 1 x IR Remote Receiver • 4 x tactile Switches • 15 x LED (different colors) • 1 x Seven segment display • 1 x buzzer • 1 x 50K potentiometer • 2 x tilt switch • 10 x 220 Ohm resistors • 10 x 1k Ohm resistors




Prijzen zijn incl. 21% BTW en
onder voorbehoud.

Discover!

**DISCOVER VELLEMAN'S NEW RANGE
OF PRODUCTS FOR ARDUINO AND RASPBERRY PI.**

YOUR DEALER

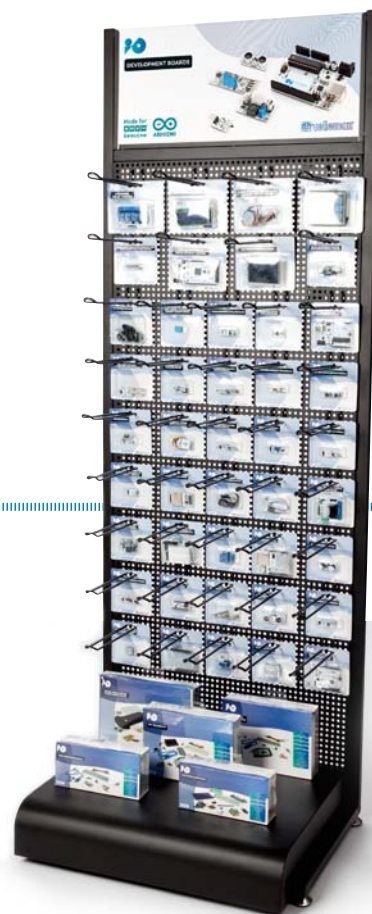

5 410329 667269 FOL/VMA101

Misprints reserved. Please do not litter. Valid till supplies last. Responsible publisher: E. Diels,
Velleman NV, Legen Heirweg 33, 9890 Gavere. Copyright Velleman NV.
BE (09) 389 94 03 - NL 0765 14 75 63 + 32 (0)9 389 93 35 sales@velleman.eu